

ACCESSORIES for Sanding, Grinding, Polishing





Rotary Sander/Polisher Pads

- 1.1 Rotary Pad High Profile(Soft)
- 1.2 Rotary Pad Middle Profile




Backing Pads for Foam Pad & Wool Buffing Pads

- 1.3 FlexEdge Rotary Backing Plate



Backing Pads For Resin Fibre Discs

- 2.1 Backing Pads For Resin Fibre Discs (Plastic Injected)



DA Sander Backing Pads, Interface Pads

- 3.1 DA Pads Introductions
- 3.2 DA Pads 1-3.5 inch
- 3.3 Classic DA Pads
- 3.4 PRO-Quality DA Backing Pads
- 3.5 Dust Free Sanding Pads
- 3.6 Dust Devil™ V3 DA Pads
- 3.7 Dust Free Sanding Pads



Sanding Machine Pads

- 3.8 Specially Featured Backing Plates for Sanding Machine



Pad Velcor Protector

- 3.9 Pad Velcor Protector



Roloc Disc Holders and Pads

- 4.1 Roloc Disc Holder and Pads



Rubber Eraser Pads

- 4.2 Rubber Eraser Pads



Drill Pads and Adaptors

- 5.1 Drill Pads and Adaptors



Hand Pads

- 6.1-6.2 Hand Pads
- 6.3 Dust-Free Hand Sanding Blocks



Foam pads

- 8.1 Foam Pads Introductions
- 8.2 Foam Pads Classic Range
- 8.3 Diamond-Cross Foam pads
- 8.4 Specially Featured Foam Pads
- 8.5 Double-Side Foam Pads
- 8.6 Spot Polishing Pads and Foam Applicators
- 8.7 Foam Polishing Balls and Cones



Wool Pads

- 9.1 Wool Material Introduction
- 9.2-9.3 Wool Pads



Stone Working Pads, Felt Mops

- 9.4 Stone Working Pad and Felt Mops

1.1 Rotary Pad High Profile



PUR molded, soft density.
Work with lambswool pads, foam pads and abrasive discs.
Ideal for contour polishing e.g. auto-body, fiber-glass boat, surfboard.



Item No.	Size	Thread	Velcro	Max.RPM	Density	Thickness
14222-12	2" (50mm)	5/8"-11	✓	12000	Soft	21.4mm
14222-22	2" (50mm)	M14-2	✓	12000	Soft	21.4mm
14232-12	3" (70mm)	5/8"-11	✓	12000	Soft	22mm
14232-22	3" (70mm)	M14-2	✓	12000	Soft	22mm

Item No.	Size	Thread	Velcro	Max.RPM	Density	Thickness
14350-12	5" (123mm)	5/8"-11	✓	8000	Soft	27mm
14350-22	5" (123mm)	M14-2	✓	8000	Soft	27mm
14350-32	5" (123mm)	M16-2	✓	8000	Soft	27mm
16360-12	6" (148mm)	5/8"-11	✓	5000	Soft	28.5mm
16360-22	6" (148mm)	M14-2	✓	5000	Soft	28.5mm
16360-32	6" (148mm)	M16-2	✓	5000	Soft	28.5mm

Item No.	Size (D)	Thread	Face	Max.RPM	Density	Thickness
16365-TF	6.5" (166mm)	T	F	5000	Soft	31.5mm
16380-TF	8" (200mm)	T	F	4500	Soft / Medium	33mm

T (Thread)	1=5/8"-11	F (Face)	1=PSA
	2=M14-2		2=Velcro
	3=M16-2		5=Canvas

1.2 Rotary Pad Middle Profile

Middle Profile Backing pads for general polishing job.
PUR molded, high flexibility and durability.
Available densities: Soft (White PUR), Medium (Yellow PUR)



Item No.	Size	Thread	Velcro	Density
14212-24	1.2" (30mm)	M14	✓	Soft
14220-24	2" (50mm)	M14	✓	Soft
14231-24	3" (74mm)	M14	✓	Soft
14212-14	1.2" (30mm)	5/8"-11	✓	Soft
14220-14	2" (50mm)	5/8"-11	✓	Soft
14231-14	3" (74mm)	5/8"-11	✓	Soft

Remark: PSA face and M10-1.5 thread are available upon demand



Item No.	Size	Thread	Velcro	Max.RPM	Density
14240-22	4" (99mm)	M14-2	✓	12000	Medium
14240-42	4" (99mm)	M10-1.5	✓	12000	Medium
14245-12	4.5" (112mm)	5/8"-11	✓	10000	Medium
14245-22	4.5" (112mm)	M14-2	✓	10000	Medium
14250-12	5" (122.5mm)	5/8"-11	✓	10000	Medium
14250-22	5" (122.5mm)	M14-2	✓	10000	Medium
14260-12	6" (147mm)	5/8"-11	✓	7000	Medium
14260-22	6" (147mm)	M14-2	✓	7000	Medium



Item No.	Size	Thread	Velcro	Max.RPM	Density
10370-12	7" (177mm)	5/8"-11	✓	5000	Medium
10370-22	7" (177mm)	M14-2	✓	5000	Medium
10370-32	7" (177mm)	M16-2	✓	5000	Medium



Item No.	Size	Thread	Velcro	Max.RPM	Density
16040-22	4" (99mm)	M14-2	✓	12000	Medium
16040-42	4" (99mm)	M10-1.5	✓	12000	Medium
16045-12	4.5" (112mm)	5/8"-11	✓	10000	Medium
16045-22	4.5" (112mm)	M14-2	✓	10000	Medium
16050-12	5" (122.5mm)	5/8"-11	✓	10000	Medium
16050-22	5" (122.5mm)	M14-2	✓	10000	Medium
16060-12	6" (147mm)	5/8"-11	✓	7000	Medium
16060-22	6" (147mm)	M14-2	✓	7000	Medium

1.3 FlexEdge Rotary Backing Plate

FlexEdge

Backing Plate for Foam Pads and Wool Pads


The FlexEdge Urethane Backing Pads are the indispensable part to make a perfect carved surface polishing
The microcellular Urethane foam has good flexibility and can absorb the vibration, it is extremely durable to withstand the rigorous operation.
The Velcro™ hook facing is adopted, it is molded with the Urethane foam and creates a permanent lamination.



Item No.	Size	Thread	Velcro	Max.RPM	Density
13051-12	5" (122.5mm)	5/8"-11	√	5000	Medium
13051-22	5" (122.5mm)	M14-2	√	5000	Medium
13051-32	5" (122.5mm)	M16-2	√	5000	Medium



Item No.	Size	Thread	Velcro	Max.RPM	Density
13060-1	6" (147mm)	5/8"-11	√	5000	Medium
13060-2	6" (147mm)	M14-2	√	5000	Medium
13060-3	6" (147mm)	M16-2	√	5000	Medium
13063-1	6.3" (162mm)	5/8"-11	√	5000	Medium
13063-2	6.3" (162mm)	M14-2	√	5000	Medium
13063-3	6.3" (162mm)	M16-2	√	5000	Medium

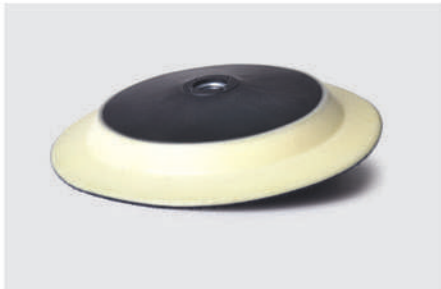

Item No.	Size	Thread	Velcro	Max.RPM	Density
12270-12	7" (178mm)	5/8"-11	√	5000	Soft
12270-22	7" (178mm)	M14-2	√	5000	Soft
12263-12	6.3" (163mm)	5/8"-11	√	5000	Soft
12263-22	6.3" (163mm)	M14-2	√	5000	Soft

1.4 FlexEdge Rotary Backing Plate

Backing pads for recessed foam pads and wool buffing pads



Item No.	Size	Thread	Velcro	Max.RPM	Density
13068-1	6.8" (175mm)	5/8"-11	√	5000	Medium
13068-2	6.8" (175mm)	M14-2	√	5000	Medium
13068-3	6.8" (175mm)	M16-2	√	5000	Medium




Item No.	Size	Thread	Velcro	Max.RPM	Density
14268-1	6.8" (175mm)	5/8"-11	√	5000	Medium
14268-2	6.8" (175mm)	M14-2	√	5000	Medium
14268-3	6.8" (175mm)	M16-2	√	5000	Medium



Item No.	Size	Thread	Velcro	Max.RPM	Density
11171-12	6.5" (165mm)	5/8"-11	√	5000	Medium
11171-12	6.5" (165mm)	M14-2	√	5000	Medium






Item No.	Size	Thread	Velcro	Max.RPM	Density
10161-122	6" (152mm)	5/8"-11	√	5000	Medium
10161-222	6" (152mm)	M14-2	√	5000	Medium
10161-322	6" (152mm)	M16-2	√	5000	Medium



2.1 Backing pads for Resin Fibre Discs (Injected)

Plastic Injected Backing pads

Work with high-speed right angle grinders
Pad built with spiral cooling ribs
Built of high impact-resistant material
Customized flexibility and color available

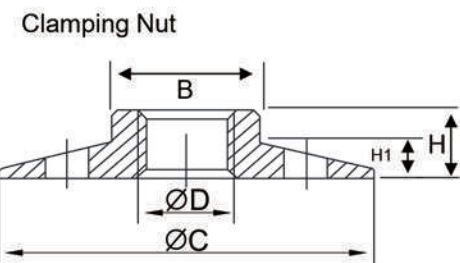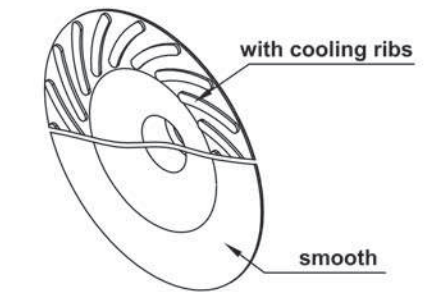

Item No.	Diameter	Thread	Abrasive	Flexibility	Face	Color	Max.RPM
61040-121	98mm	5/8"-11	4"	Medium	Spiral	White	15000
61040-221	98mm	M14-2	4"	Medium	Spiral	White	15000
61040-421	98mm	M10-1.5	4"	Medium	Spiral	White	15000
61045-121	108mm	5/8"-11	4.5"	Medium	Spiral	White	13000
61045-221	108mm	M14-2	4.5"	Medium	Spiral	White	13000
61050-121	123mm	5/8"-11	5"	Medium	Spiral	White	12300
61050-221	123mm	M14-2	5"	Medium	Spiral	White	12300
61070-121	170mm	5/8"-11	7"	Medium	Spiral	White	8600
61070-221	170mm	M14-2	7"	Medium	Spiral	White	8600

Each pad is supplied with a clamping nut.
Smooth face pad is available for customized orders only.

Item No.	C	D	H	H1	B	Material	For Pad
CN-55-5/8	55 mm	5/8"-11	10.5 mm	6 mm	22 mm	Zinc-Alloy	6"-8"
CN-55-M14	55 mm	M14-2	10.5 mm	6 mm	22 mm	Zinc-Alloy	6"-8"
CN-45-5/8	45 mm	5/8"-11	12 mm	4 mm	22 mm	Zinc-Alloy	4"-5"
CN-45-M14	45 mm	M14-2	12 mm	4 mm	22 mm	Zinc-Alloy	4"-5"
CN-45-M10	45 mm	M10-1.5	12 mm	4 mm	22 mm	Zinc-Alloy	4"-5"

Backing pads for Resin Fibre Discs(no clamp nut)

Pad does not come with clamp nut, instead it uses the flange and lock nut of angle grinder




Item No.	Diameter	Hole	Disc Size	Flexibility	Face	Color	Max.RPM
61230	75mm	16 mm	3"	Medium	Spiral	Black	15000
61240	92mm	16 mm	4"	Medium	Spiral	Black	15000
61245	108mm	22 mm	4.5"	Medium	Spiral	Black	13000
61250	118mm	22 mm	5"	Medium	Spiral	Black	12300
61270	170mm	22 mm	7"	Medium	Spiral	Black	8600

3.1 DA Pads Introduction




Why shall you try SunnyPads DA pads ?


- 1) Most of all our DA pads are PolyUrethane molded, it is strong and durable to meet the toughest works.
- 2) Long validity period : With our unique formulation, most of our DA pads are Okay to be stored for up to 5 years and keep good flexibility and strength.
- 3) Every pad is inspected per weight / balance / run-out standards, ensure it is free of vibration on user's sander.
- 4) We use the best quality hook & Vinyl, the life time is guaranteed.
- 5) We have wide range of specifications available for your choose, we also accept customized design.

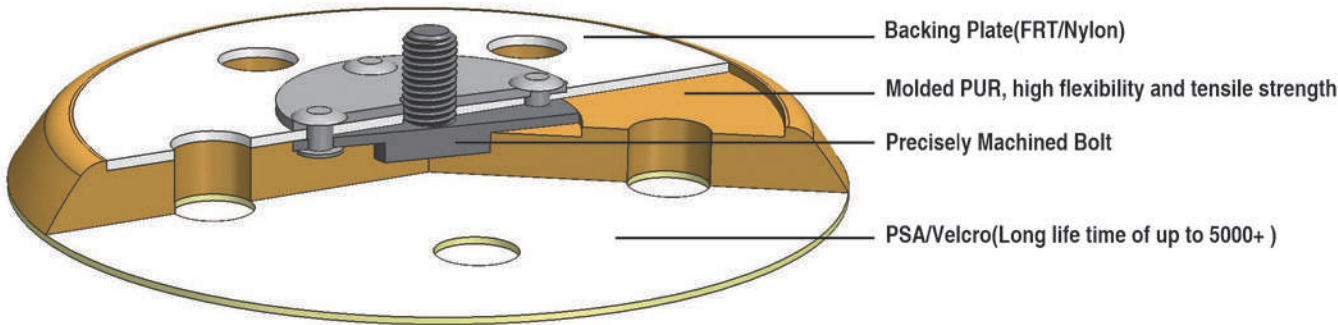

5" Sanding Pad Hole Pattern

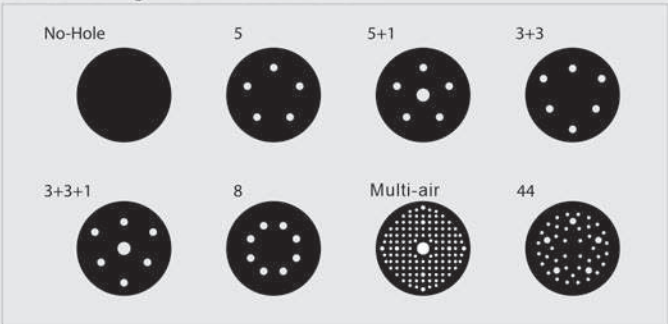

6" Sanding Pad Hole Pattern

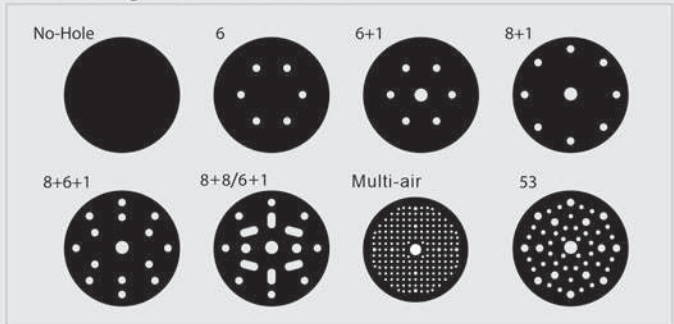

3.2 1"~3.5" DA backing pads

Work with air sanding machines for spot sanding.



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Foam Thickness
14412-11	1.2" (31mm)	1/4"-20 Int		✓	20000	Soft	no hole	n/a	10mm
14414-11	1.2" (31mm)	1/4"-20 Int		✓	20000	Soft	no hole	n/a	10mm
14414-12	1.2" (31mm)	1/4"-20 Int	✓		20000	Soft	no hole	n/a	10mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
22120-11	2" (50mm)	5/16"-24		✓	20000	Medium	no hole	24g	9.5mm
22120-12	2" (50mm)	5/16"-24	✓		20000	Medium	no hole	24g	9.5mm
22120-21	2" (50mm)	M6		✓	20000	Medium	no hole	21g	9.5mm
22120-22	2" (50mm)	M6	✓		20000	Medium	no hole	21g	9.5mm
22130-11	3" (74mm)	5/16"-24		✓	20000	Medium	no hole	33g	12mm
22130-12	3" (74mm)	5/16"-24	✓		20000	Medium	no hole	32g	12mm
22130-21	3" (74mm)	M6		✓	20000	Medium	no hole	30g	12mm
22130-22	3" (74mm)	M6	✓		20000	Medium	no hole	29g	12mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
22330-121	3" (74mm)	5/16"-24	✓		20000	Medium	no hole	30g	10mm
22330-221	3" (74mm)	1/4"-20	✓		20000	Medium	no hole	30g	10mm
22336-121	3" (74mm)	5/16"-24	✓		20000	Medium	6	30g	10mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
23731-04	3" (74mm)	5"/16-24	✓		20000	Medium	6	32g	10mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
26030-1	3" (74mm)	5/16-24		✓	12000	Soft / Medium	no hole	73g	14.5mm
26030-2	3" (74mm)	5/16"-24	✓		12000	Soft / Medium	no hole	73g	14.5mm
26035-1	3.5" (89mm)	5/16"-24		✓	12000	Medium	no hole	85g	14.5mm
26035-2	3.5" (89mm)	5/16"-24	✓		12000	Medium	no hole	85g	14.5mm

3.3 Classic DA Pads

Dual Actional Sander Backing Pads, low profile
PUR molded, Medium density, good balance between performance and cost
Pad with fixed 5/16"-24 bolt




Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
21040-2	4" (99mm)	5/16"-24	✓		12000	Medium	no hole	100g	14mm
21050-1	5" (122.5mm)	5/16"-24		✓	12000	Medium	no hole	103g	9.5mm
21050-2	5" (122.5mm)	5/16"-24	✓		12000	Medium	no hole	100g	9.5mm
21150-1	5" (122.5mm)	5/16"-24		✓	12000	Medium	3+3	103g	9.5mm
21150-2	5" (122.5mm)	5/16"-24	✓		12000	Medium	3+3	100g	9.5mm
21250-1	5" (122.5mm)	5/16"-24		✓	12000	Medium	5	103g	9.5mm
21250-2	5" (122.5mm)	5/16"-24	✓		12000	Medium	5	100g	9.5mm
21350-1	5" (122.5mm)	5/16"-24		✓	12000	Medium	8	103g	9.5mm
21350-2	5" (122.5mm)	5/16"-24	✓		12000	Medium	8	100g	9.5mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
21060-1	6" (147mm)	5/16"-24		✓	12000	Medium	no hole	135g	9.5mm
21060-2	6" (147mm)	5/16"-24	✓		12000	Medium	no hole	130g	9.5mm
21160-1	6" (147mm)	5/16"-24		✓	12000	Medium	6	135g	9.5mm
21160-2	6" (147mm)	5/16"-24	✓		12000	Medium	6	130g	9.5mm

Dual Actional Sander Backing Pads, middle profile, bevel edge
PUR molded, Soft density, Ideal for contour sanding
Pad with fixed 5/16"-24 bolt



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
22050-1	5" (123mm)	5/16"-24		✓	12000	Soft/Mediu	no hole	103g	16mm
22050-2	5" (123mm)	5/16"-24	✓		12000	Soft/Mediu	no hole	100g	16mm
22250-1	5" (123mm)	5/16"-24		✓	12000	Soft/Mediu	5	103g	16mm
22250-2	5" (123mm)	5/16"-24	✓		12000	Soft/Mediu	5	100g	16mm
22060-1	6" (148mm)	5/16"-24		✓	12000	Mediu	no hole	135g	16mm
22060-2	6" (148mm)	5/16"-24	✓		12000	Mediu	no hole	130g	16mm

3.4 Pro-Quality DA Backing Pads



The backing pad is the key component for building a non-vibration air sander. SunnyPads offer this range of backing pads with guaranteed vibration-free, precise weight, and high durability.



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
23050-1	5" (123mm)	5/16"-24		✓	12000	Medium	no hole	100g	9.5mm
23050-2	5" (123mm)	5/16"-24	✓		12000	Medium	no hole	100g	9.5mm
23250-1	5" (123mm)	5/16"-24		✓	12000	Medium	5	100g	9.5mm
23250-2	5" (123mm)	5/16"-24	✓		12000	Medium	5	100g	9.5mm
23060-1	6" (148mm)	5/16"-24		✓	12000	Medium	no hole	127g	9.5mm
23060-2	6" (148mm)	5/16"-24	✓		12000	Medium	no hole	125g	9.5mm
23160-1	6" (148mm)	5/16"-24		✓	12000	Medium	6	127g	9.5mm
23160-2	6" (148mm)	5/16"-24	✓		12000	Medium	6	125g	9.5mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
23550-1	5" (122mm)	5/16"-24		✓	12000	Medium	no hole	97g	7.7mm
23550-2	5" (122mm)	5/16"-24	✓		12000	Medium	no hole	95g	7.7mm
23555-1	5" (122mm)	5/16"-24		✓	12000	Medium	5	97g	7.7mm
23555-2	5" (122mm)	5/16"-24	✓		12000	Medium	5	95g	7.7mm
23560-1	6" (148mm)	5/16"-24		✓	12000	Medium	no hole	127g	8mm
23560-2	6" (148mm)	5/16"-24	✓		12000	Medium	no hole	125g	8mm
23566-1	6" (148mm)	5/16"-24		✓	12000	Medium	6	127g	8mm
23566-2	6" (148mm)	5/16"-24	✓		12000	Medium	6	125g	8mm




The Pro-Quality level DA pads are designed and manufactured specially for professional air sander building, the pads are 100% tested and they are assured to be in compliance with high requirement of strength, run-out, balance, weight, flatness, and also less vibration.

3.5 Dust Free Sanding Pads

Dual Actional Sander Backing Pads with Side Hole

- PUR molded, Medium density , good durability.
- Pad with optional bolt for 5/16"-24 and M8
- Better cooling and less dust while sanding

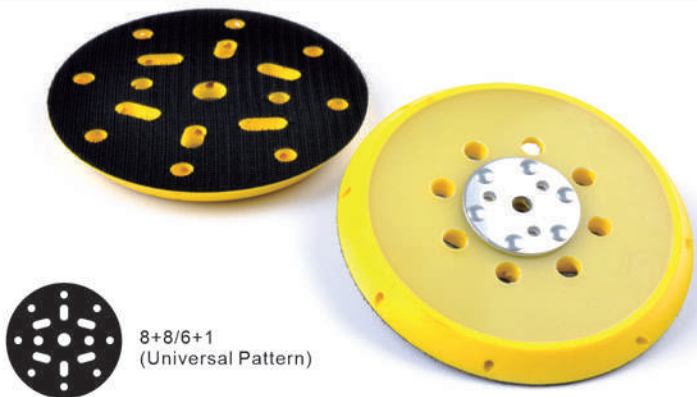

Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
21780-02	6" (148mm)	M8 & 5/16"	✓		12000	Medium	8+8/6+1	140g	11.5mm




Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
21352-02	5" (123mm)	M8 & 5/16"	✓		12000	Medium	8+1	140g	11.5mm

Soft Density Dual Actional Sander Backing Pads

Side and center holes to benefit dust suction performance
Soft density, ideal for fine sanding or primer sanding



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
25150-1	5" (124mm)	5/16"-24		✓	12000	Soft/Medium	3+3+1	97g/100g	11.5mm
25150-2	5" (124mm)	5/16"-24	✓		12000	Soft/Medium	3+3+1	97g/100g	11.5mm

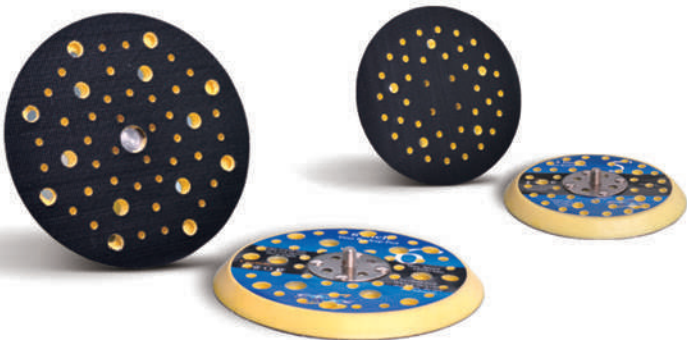

Multi-hole DA pads
Designed to work with net abrasive for dust-free sanding


Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
21650-2	5" (122.5mm)	5/16"-24	✓		12000	Medium	44	97g	9.5mm
21660-2	6" (148mm)	5/16"-24	✓		12000	Medium	53	127g	9.5mm

3.6 Dust Devil™ V3 DA Pads




Dust Devil™ V3
Multi-Hole Universal Sanding Pad

- ✓ Creative dust cover design.
- ✓ Universal hole pattern.
- ✓ Available with medium and soft density.
- ✓ Pad is well balanced for smooth sanding.
- ✓ Fixed-bolt or changeable-bolt version.
- ✓ Changeable-bolt version fits Festool/Rupes/Makita Sanders.

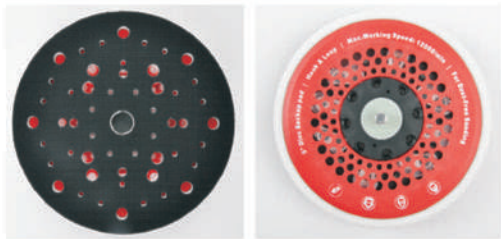

One Pad for all Discs :

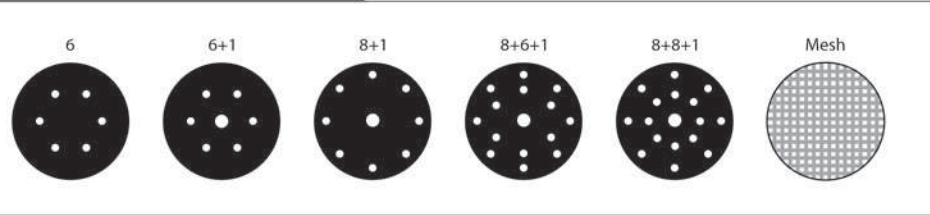

- Available with :
- Pad velcro protector
 - Cushion pad
 - Medium Density (yellow)
 - Soft Density (white)

Item No.	Size	Thread	Velcro	Max.RPM	Density	Hole	Weight	Thickness
23965-02	6" (148mm)	M8 and 5/16"	√	12000	Medium	53 hole	145g	12mm
23965-12	6" (148mm)	Fixed 5/16"	√	12000	Medium	53 hole	130g	12mm
23765-02	6" (148mm)	M8 and 5/16"	√	12000	Soft	53 hole	145g	12mm
23765-12	6" (148mm)	Fixed 5/16"	√	12000	Soft	53 hole	130g	12mm

3.6 Dust Devil™ V3 DA Pads

Backing plate for RUPES FLEX sanders



Item No.	Size	Thread	Velcro	Max.RPM	Density	Hole	Weight	Thickness
23770-02	6" (148mm)	M8	√	12000	Medium	8+6+1	145g	12mm

Backing plate for FESTOOL sanders



Item No.	Size	Thread	Velcro	Max.RPM	Density	Hole	Weight	Thickness
20665	6" (148mm)	M8	√	12000	Medium	65	145g	12mm


3.7 Dust Free Sanding Pads

New Generation of Multi-Hole Universal Sanding Pad


- ✓ Multi-hole pattern for dust-free sanding
- ✓ Well balanced for smooth operation

- Available with :
- Medium Density (yellow)
 - Soft Density (white)

6" Backing Plate

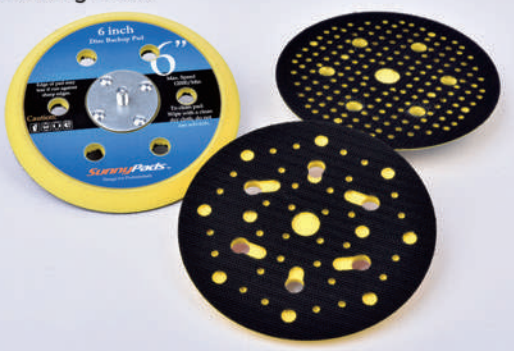


20967-12



For Norton 6" Multi-air Disc


20965-12




Match Sanding Discs:




6




6+1




8+1



8+6+1




8+8+1




Mesh

5" Backing Plate

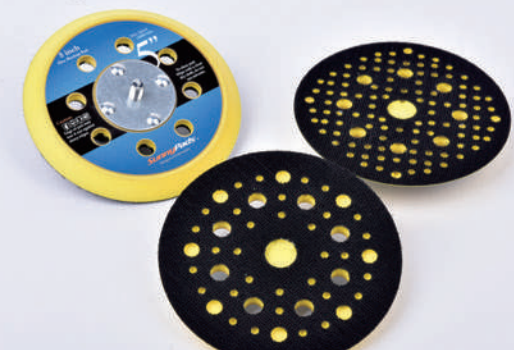


20957-12



For Norton 5" Multi-air Disc

20959-12



20955-12




8+8+1



5+1



Mesh



Item No.	Size	Thread	Face	Max.RPM	Density	Hole	Weight	Thickness
20967-12	6" (148mm)	Fixed 5/16"	J-Hook	12000	Medium	multi- hole	125g	10mm
20965-12	6" (148mm)	Fixed 5/16"	J-Hook	12000	Medium	multi- hole	125g	10mm
20957-12	5" (123mm)	Fixed 5/16"	J-Hook	12000	Medium	multi- hole	97g	10mm
20959-12	5" (123mm)	Fixed 5/16"	J-Hook	12000	Medium	multi- hole	97g	10mm
20955-12	5" (123mm)	Fixed 5/16"	J-Hook	12000	Medium	multi- hole	97g	10mm

Remark: Soft density pads are available for special request orders, standard production is based on medium density.

3.8 Specially featured Backing Plate for Sanding Machine

Sander Backing Plates



27040
For EMM/Rupes Sander



27046




27010



Item No.	Size	Mounting	Color	Hole	Weight
27046	98x73 mm	4 bolts	Yellow	n/a	40g
27040	225x116 mm	4 bolts	Yellow	10	170g
27010	77x70 mm	2 bolts	Yellow	n/a	n/a

Various size and thickness of interface pads available

Backing Plates for Dry-wall & large area sanding

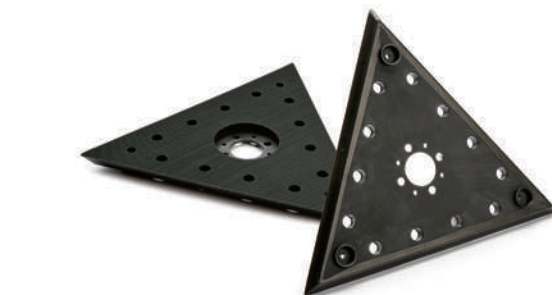

27012



27680

Fits Dynabrade, Norton, Mirka sanders

Item No.	Size	Mounting	Color	Hole	Weight
27012	268x268x268mm	4 bolts	Black	12	230g

Item No.	Size	Mounting	Color	Hole	Weight
27680	8" (197.5mm)	Multi-Ways	Yellow	multi-hole	190g

Backing Plates for BOSCH Sanders



27450



27625


Item No.	Size	Mounting	Color	Hole	Weight
27450	5" (123mm)	8 bolts	White	8	50g
27625	6" (148mm)	M8	Black	6	130g

27450 fits PEX 220 A, PEX 220 AE, Skil 7402 / 7490
27625 fits GEX 150, GEX 150 AC, GEX 150 Turbo


Backing Pads for Black&Deck/Poter-Cable/Dewalt/Makita Sanders



27550

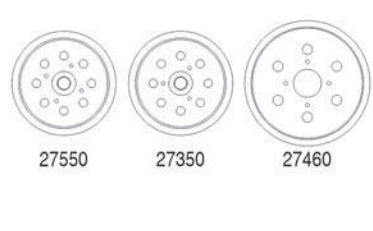

27350

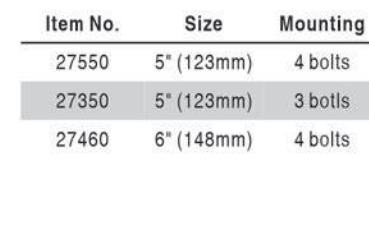

27460

Item No.	Size	Mounting	Color	Hole	Weight
27550	5" (123mm)	4 bolts	Black	8	50g
27350	5" (123mm)	3 bolts	Black	8	53g
27460	6" (148mm)	4 bolts	Black	6	85g

3.9 Pad velcro protector

Pad velcro protector




Item No.	Size	Foam Thickness	Hole	Density	Remark
72286	6" (148mm)	n/a	53	n/a	
72282	6" (148mm)	n/a	8+6+1	n/a	
72283	6" (148mm)	n/a	6	n/a	
72284	6" (148mm)	n/a	8+1	n/a	
72287	6" (148mm)	n/a	8+8/6+1	n/a	
72290	6" (148mm)	n/a	8+8+1	n/a	




Item No.	Size	Foam Thickness	Hole	Density	Remark
72281	5" (123mm)	n/a	no hole	n/a	
72285	5" (123mm)	n/a	44	n/a	
72288	5" (123mm)	n/a	3+3+1	n/a	

5" Pad velcro protector

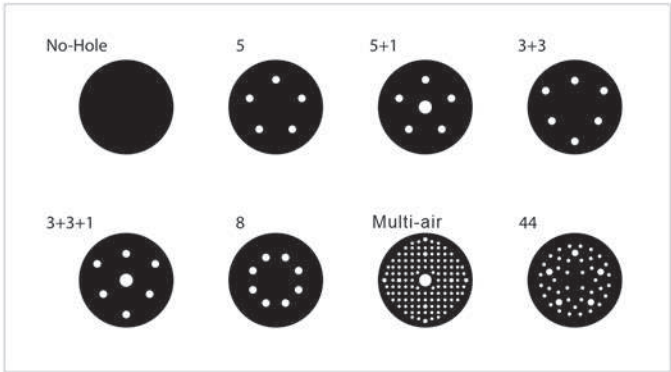

6" Pad velcro protector

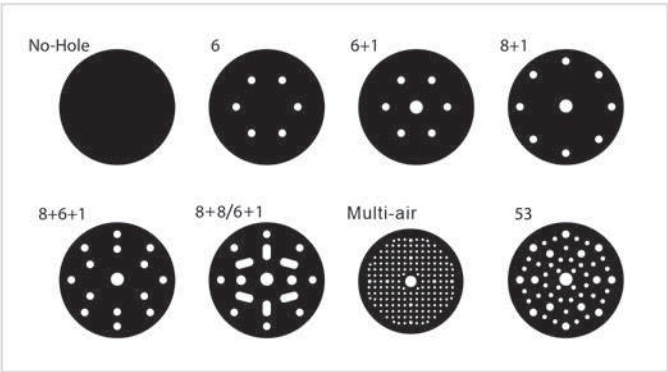

PSA-Velcro Converter



Item No.	Size	Cushion Thickness	Hole	Density	Remark
72291C	2" (50mm)	3mm	no hole	Medium	PSA - Loop
72292C	3" (74mm)	3mm	no hole	Medium	PSA - Loop
72291	2" (50mm)	n/a	no hole	n/a	PSA - Loop
72292	3" (74mm)	n/a	no hole	n/a	PSA - Loop



3.9 Interface Pads

Interface Cushion pads with extra-soft foam layer



Cushion pads are available in customized sizes and shapes.



Item No.	Size	Foam Thickness	Hole	Density	Remark
72200	6" (148mm)	10mm	no hole	Extra Soft	
72201	6" (148mm)	10mm	8+6+1	Extra Soft	
72202	6" (148mm)	10mm	53	Extra Soft	
72204	6" (148mm)	10mm	6+1	Extra Soft	
72205	6" (148mm)	10mm	6	Extra Soft	
72207	6" (148mm)	10mm	8+1	Extra Soft	
72208	6" (148mm)	10mm	8+8/6+1	Extra Soft	
72209	6" (148mm)	10mm	8+8+1	Extra Soft	

Item No.	Size	Foam Thickness	Hole	Density	Remark
72220	5" (123mm)	10mm	no hole	Extra Soft	
72221	5" (123mm)	10mm	5+1	Extra Soft	
72222	5" (123mm)	10mm	44	Extra Soft	
72223	5" (123mm)	10mm	3+3	Extra Soft	
72224	5" (123mm)	10mm	8+1	Extra Soft	
72226	5" (123mm)	10mm	5	Extra Soft	
72227	5" (123mm)	10mm	3+3+1	Extra Soft	

Item No.	Size	Foam Thickness	Hole	Density	Remark
72240	3" (74mm)	10mm	n/a	Extra Soft	
72250	2" (50mm)	10mm	n/a	Extra Soft	

Interface Cushion pads with higher density foam layer




Item No.	Size	Foam Thickness	Hole	Density	Remark
72229	6" (148mm)	10mm	6+1	Soft	
72225	5" (122.5mm)	12mm	n/a	Soft	
72241	3" (74mm)	12mm	n/a	Soft	
72301	100x75mm	20mm	n/a	Soft	Rectangle
72302	100x75mm	15mm	n/a	Soft	Rectangle




4.1 Roloc Disc Holders and Pads


Rubber Molded Roloc Disc Holders
In Medium & Hard Flexibility

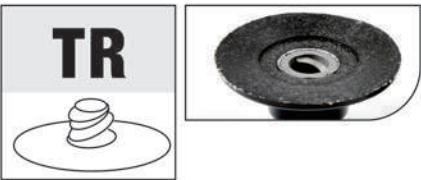

Item No.	Diameter	Thread	Abrasive	Flexibility	Type	Max.RPM
32010M-11	24mm	1/4"-20	1"	65(M)	TR	30000
32020M-11	46mm	1/4"-20	2"	65(M)	TR	30000
32030M-11	69mm	1/4"-20	3"	65(M)	TR	20000
32040M-11	96mm	1/4"-20	4"	65(M)	TR	12000
32010H-11	24mm	1/4"-20	1"	85(H)	TR	30000
32020H-11	46mm	1/4"-20	2"	85(H)	TR	30000
32030H-11	69mm	1/4"-20	3"	85(H)	TR	20000
32040H-11	96mm	1/4"-20	4"	85(H)	TR	12000

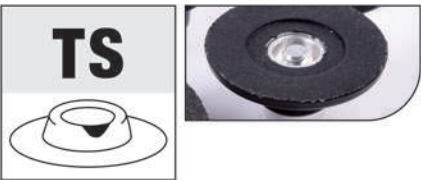

Item No.	Diameter	Thread	Abrasive	Flexibility	Type	Max.RPM
32010M-12	24mm	1/4"-20	1"	65(M)	TS	30000
32020M-12	46mm	1/4"-20	2"	65(M)	TS	30000
32030M-12	69mm	1/4"-20	3"	65(M)	TS	20000
32040M-12	96mm	1/4"-20	4"	65(M)	TS	12000
32010H-12	24mm	1/4"-20	1"	85(H)	TS	30000
32020H-12	46mm	1/4"-20	2"	85(H)	TS	30000
32030H-12	69mm	1/4"-20	3"	85(H)	TS	20000
32040H-12	96mm	1/4"-20	4"	85(H)	TS	12000

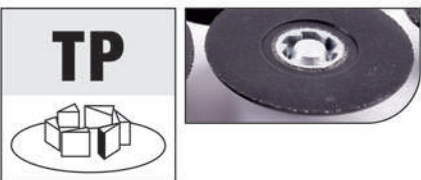

Item No.	Diameter	Thread	Abrasive	Flexibility	Type	Max.RPM
32010M-13	24mm	1/4"-20	1"	65(M)	TP	30000
32020M-13	46mm	1/4"-20	2"	65(M)	TP	30000
32030M-13	69mm	1/4"-20	3"	65(M)	TP	20000
32040M-13	96mm	1/4"-20	4"	65(M)	TP	12000
32010H-13	24mm	1/4"-20	1"	85(H)	TP	30000
32020H-13	46mm	1/4"-20	2"	85(H)	TP	30000
32030H-13	69mm	1/4"-20	3"	85(H)	TP	20000
32040H-13	96mm	1/4"-20	4"	85(H)	TP	12000


Soft interface pads for Velcro and PSA discs




Item No.	Size	Thread	Velcro	PSA	Density	Thickness
31112-1	1.2" (30mm)	R-lock		✓	Ultra-Soft	10mm
31112-2	1.2" (30mm)	R-lock	✓		Ultra-Soft	10mm

Item No.	Size	Thread	Velcro	Max.RPM	Density	Thickness
310015	1.5" (38mm)	R-lock	✓	6000	Ultra-Soft	18mm
31002	2" (50mm)	R-lock	✓	6000	Ultra-Soft	18mm
31003	3" (74mm)	R-lock	✓	6000	Ultra-Soft	19mm

4.2 Eraser Pads

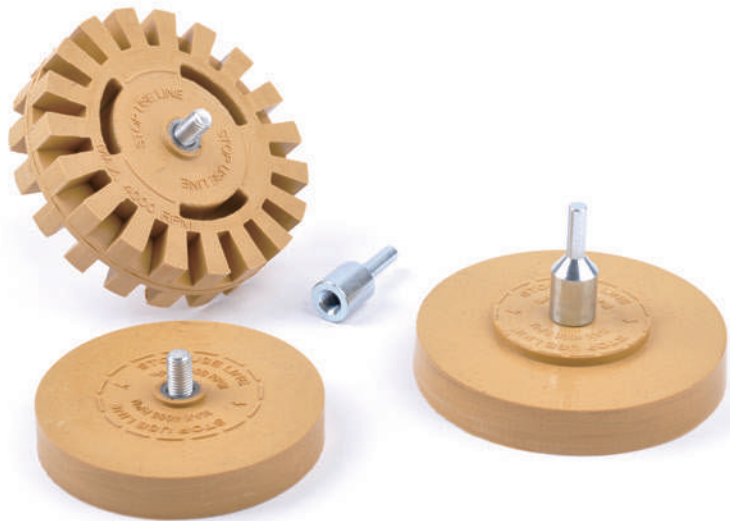

- Fast removal of Pinstripes, Adhesive and Double Faced Tape
- Molded of specially modulated rubber, no damage to paint
- 1/4" Drill Adaptor included

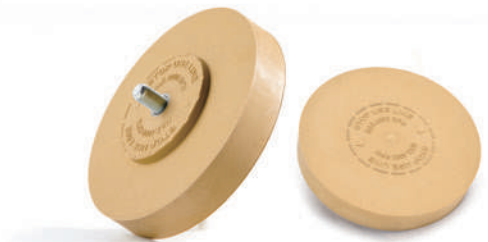


Item No.	Diameter	Thickness	Thread	Max.RPM
32135	3.5" (88mm)	15mm	5/16"-24	4000
32140	4" (103.5mm)	20mm	5/16"-24	4000



Item No.	Diameter	Thickness	Thread	Max.RPM
32235	3.5" (88mm)	15mm	5/16"-24	4000
32242	4" (100mm)	16.5mm	5/16"-24	3500



Item No.	Diameter	Thickness	Thread	Max.RPM
32240	4" (100mm)	26.4mm	5/16"-24	4000

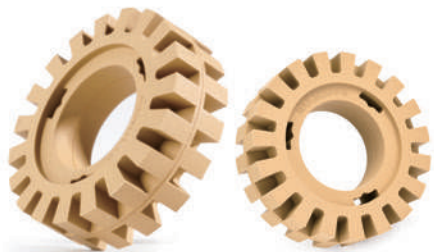

Item No.	Diameter	Thickness	Thread	Max.RPM
32241	4" (103mm)	30mm	n/a	3500

5.1 Drill Pads, Thread Adaptors

PUR molded, high flexibility and durability.
Available densities: Soft (White PUR), Medium (Yellow PUR)



Item No.	Size	Thread	Velcro	Max.RPM	Density	Thickness
22220-22	2" (50mm)	M6(Female)	✓	5000	Medium	10.5mm
22230-22	3" (74mm)	M6(Female)	✓	5000	Medium/Soft	11mm

Item No.	Size	Thread	Velcro	Max.RPM	Density	Thickness
22222-22	2" (50mm)	M6	✓	5000	Soft	21.4mm
22232-22	3" (70mm)	M6	✓	5000	Soft	22mm



Thread Adaptors




Item No.	Thread	Shank Size	Remark
72001	5/8"-11	6.35mm	
72002	M16-2	6.35mm	
72003	M14-2	6.35mm	
72004	M6-1	6.35mm	
72005	M14-2	8mm	
72011	1/4"-20 (Interior)	6.35mm	
72007	M10-1.5	6.35mm	
72008	1/4"-20	6mm	

Item No.	Internal Thread	External Thread	Remark
72101	5/8"-11	5/8"-11	For Double Side wool pads
72102	M14	5/8"-11	For Double Side wool pads
72103	M16	5/8"-11	For Double Side wool pads
72104	M14-2	M16	

Item No.	Thread	Thread	Remark
72121	5/16"-24	M6-1	
72122	5/16"-24	1/4"-20	



A trademark of SunnyPads



Spot Repair



Round Disc Hand Block



Rectangle Hand Block



Dust-Free Sanding Pad



Dry-Wall Sanding Pad



Wax Applicator

6.1 Hand Pads




De-Nebbing Blocks



Item No.	Diameter	Velcro	PSA	Density	Remark
71112	30mm	✓	✓	Hard	

Item No.	Diameter	Velcro	PSA	Density	Remark
71115-1	24mm		✓	Medium	
71116-1	30mm		✓	Medium	
71117-1	34mm		✓	Medium	

Round Disc Hand Pads



Item No.	Diameter	Velcro	PSA	Density	Remark
71130-1	3" (72.5mm)		✓	Medium	no center hole, slight bigger size
71130-2	3" (72.5mm)	✓		Medium	no center hole, slight bigger size
71131-1	3" (72.5mm)		✓	Soft/Medium	with center hole for water storage
71131-2	3" (72.5mm)	✓		Soft/Medium	with center hole for water storage

Item No.	Diameter	Velcro	PSA	Density	Remark
71132-1	3" (72.5mm)		✓	Soft/Medium	no center hole
71132-2	3" (72.5mm)	✓		Soft/Medium	no center hole
71132-2	3" (72.5mm)	✓		Soft/Medium	with center hole for water storage



Item No.	Diameter	Velcro	PSA	Density	Remark
71135	3.5" (90mm)	✓		Medium	
71150	5" (122.7mm)	✓		Medium	

Item No.	Disc Size	Velcro	PSA	Density	Remark
71450-1	5" (123mm)		✓	Medium	
71450-2	5" (123mm)	✓		Medium	
71460-1	6" (150mm)		✓	Medium	
71460-2	6" (150mm)	✓		Medium	

Item No.	Disc Size	Velcro	PSA	Density	Remark
71001	5" (123x56mm)	✓		Medium	
71002	6" (148x67mm)	✓		Soft	



Item No.	Disc Size	Velcro	PSA	Density	Remark
71708	5" (123mm)	✓		Medium	
71708S	5" (123mm)	✓		Soft	
71704	6" (150mm)	✓		Medium	
71704S	6" (150mm)	✓		Soft	

6.2 Hand Pads




Item No.	Size	Velcro	PSA	Density	Remark
71235	136x65.5 mm	✓		Medium	



Item No.	Size	Velcro	PSA	Density	Remark
71544-1	122 x 67 mm		✓	Medium	
71544-2	122 x 67 mm	✓		Medium	
71545-1	198 x 70 mm		✓	Medium	With Reinforced flat base
71545-2	198 x 70 mm	✓		Medium	With Reinforced flat base



Item No.	Size	Velcro	PSA	Density	Remark
71335-1	122 x 67 mm		✓	Medium	
71335-2	122 x 67 mm	✓		Medium	
71335S-2	122 x 67 mm	✓		Soft	

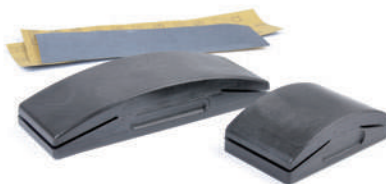

Item No.	Size	Density	Color
71205	123x69 mm	Medium	Black
71208	207x69 mm	Medium	Black
71204	122x70 mm	Rigid *	Black

- * Lower portion of 71204 is molded of rigid plastic. (Abrasive paper need to order separately)

 - Super Light-Weight
 - Comfortable holding
 - PUR molded, no smell



Item No.	Size	Velcro	PSA	Flexibility
71612-12	398.5x66 mm		✓	Rigid
71612-22	398.5x66 mm	✓		Rigid



PUR Moulded flexible hand file



Item No.	Size	Velcro	PSA	Flexibility
71510-1	441x71 mm		✓	Flexible
71510-2	441x71 mm	✓		Flexible




6.3 Dust-free Hand Sanding Blocks



Item No.	Size(mm)	Color
73005	124x68.5	Red or White
73008	196.5x68.5	Red or White
73016	399.5x69	Red or White
73009	228x114	Red or White

Hand block comes with air-valve, and an extra adaptor for use with bigger size hose

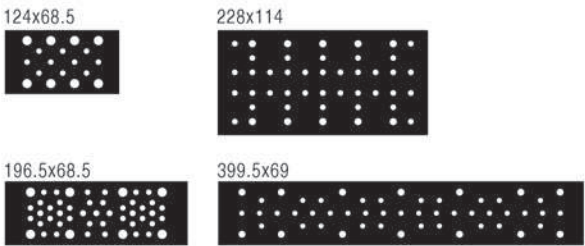

Item No.	Size(mm)	Color	Hook&Loop	Remark
73036	400x70	Red	✓	



Item No.	Size(mm)	Color	Hook&Loop	Remark
73108K	200x70	Red	✓	4 bottom plates



Item No.	Sand Disc	Color	Hook&Loop	Remark
73105K	6" (150mm)	Red	✓	3 Backing plates



6.3 Dust-free Hand Sanding Blocks

Dust Hose, Adaptors for dust free sanding



Item No.	Desc.	Hose Dia.
73121	Hose Adaptor	26mm



Item No.	Desc.	Hose Dia.	Cable/Air hose Dia.
73122	Hose&Cable Cliper	35mm	6-10mm



Item No.	Desc.	Hose Dia.
73004	Hose Adaptor	35mm



Item No.	Desc.	Hose Dia.	Air hose Dia.
73001	Hose Connector	35mm	10mm




Item No.	Hose Dia.	Hose Dia.	Hose ID	Remark
73021	Dust Hose	35mm	28mm	5 meter
73021K	Hose & Adaptor Kit	35mm	28mm	5 meter



Item No.	Hose Dia.	Hose Dia.	Hose ID	Remark
73003	Dust Hose	26mm	20mm	4 meter
73002	Cone Adaptor	26mm		Cone Dia.28-59mm
73003K	Hose&Adaptor Kit	26mm	20mm	*

*Universal Vacuum Cleaner Adaptor (fits 28-59mm port)



8.1 Foam Pads



- ✓ Designed for paint refinishing and detailing works
- ✓ Professional bonding process
- ✓ Withstand high-temperature and water wash
- ✓ Polyester sponge made in Europe and the U.S.
- ✓ Excellent tensile strength and durability
- ✓ Full range of material from heavy cutting to finishing

Foam Color Code and Specifications



Green T120 heavy cut foam is in solid construction, it fast removes the deep scratches, over spray, 1200/1500# sanding disc marks, and heavy oxidation. Cut like wool pad and leave high gloss finish. Applicable for scratch resistant and high solid ceramic paints.

T120



Yellow T80 high cut foam has an intensive cutting action that will remove deep scratches, over spray, severe swirl marks, 1500# sanding disc marks, and heavy oxidation when used with heavy polishing compounds.

T80



Blue & Maroon T60 foam has moderate cutting action that will remove 1500/2000# sand scratches, over spray, and surface imperfections when used in conjunction with polishing compounds.

T60



Orange T40 foam has a light cutting action, and will remove scratches and swirl marks while leaving a level and smooth surface, can be used in conjunction with heavy polishing compounds or micro-fine compounds for one-step polishing.

T40



Red & Gray T10 foam has very light cleaning action for removal of ultra-fine swirl marks, car wash scratches, and hazing, leaving a swirl-free gloss finish when used in conjunction with finishing polishes.

T10

8.2 Foam Pads Classic Range

Flat Face Foam Pads (None Recessed Velcro)



The flat face is the most popular version, for experienced operators. It works at the highest efficiency for cutting and polishing.


T80 Yellow

Item No.	Size	DxHxV(mm)
34023-1	3"	80x25x76
34025-1	5"	125x25x109
34026-1	6"	150x30x128
34027-1	7"	180x30x158
34028-1	8"	200x30x178



T60 Blue

Item No.	Size	DxHxV(mm)
34023-6	3"	80x25x76
34025-6	5"	125x25x109
34026-6	6"	150x30x128
34027-6	7"	180x30x158
34028-6	8"	200x30x178



T40 Orange

Item No.	Size	DxHxV(mm)
34023-4	3"	80x25x76
34025-4	5"	125x25x109
34026-4	6"	150x30x128
34027-4	7"	180x30x158
34028-4	8"	200x30x178



T10 Gray

Item No.	Size	DxHxV(mm)
34023-3	3"	80x25x76
34025-3	5"	125x25x109
34026-3	6"	150x30x128
34027-3	7"	180x30x158
34028-3	8"	200x30x178

Waffle Face Foam Pads (None Recessed Velcro)



The waffle face pad dissipates heat and reduces risk of burning the vehicle's finish. The waves speed up the air flow between the paint and the foam pad to cool the pad against over heating, they alsohelp to reduce holograms.


T80 Yellow

Item No.	Size	DxHxV(mm)
34073-1	3"	80x30x80
34075-1	5"	125x30x115
34076-1	6"	145x30x128
34077-1	7"	180x30x158
34078-1	8"	200x30x190



T60 Blue

Item No.	Size	DxHxV(mm)
34073-6	3"	80x30x80
34075-6	5"	125x30x115
34076-6	6"	145x30x128
34077-6	7"	180x30x158
34078-6	8"	200x30x190




T40 Orange

Item No.	Size	DxHxV(mm)
34073-4	3"	80x30x80
34075-4	5"	125x30x115
34076-4	6"	145x30x128
34077-4	7"	180x30x158
34078-4	8"	200x30x190



T10 Gray

Item No.	Size	DxHxV(mm)
34073-3	3"	80x30x80
34075-3	5"	125x30x115
34076-3	6"	145x30x128
34077-3	7"	180x30x158
34078-3	8"	200x30x190

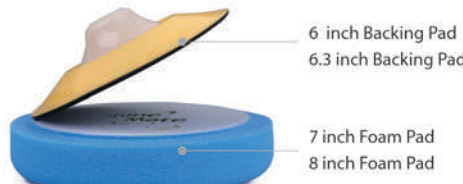

8.3 Diamond–Cross Foam Pads


6" & 7" Diamond Face Foam Pads
(Recessed Velcro)



T80 Yellow			
Item No.	Size	DxHxV(mm)	
34086-1	6"	150x35x123	
34087-1	7"	180x35x147	



T60 Blue			
Item No.	Size	DxHxV(mm)	
34086-6	6"	150x35x123	
34087-6	7"	180x35x147	




The foam pad face is divided into many independent pieces by the diamond pattern, it speed up the air flow between the foam pad and the painted surface, disseminate the heat rapidly to lower the temperature of the working face, and keep high cutting efficiency like a flat face pad.



T40 Orange			
Item No.	Size	DxHxV(mm)	
34086-4	6"	150x35x123	
34087-4	7"	180x35x147	



T10 Gray			
Item No.	Size	DxHxV(mm)	
34086-3	6"	150x35x123	
34087-3	7"	180x35x147	

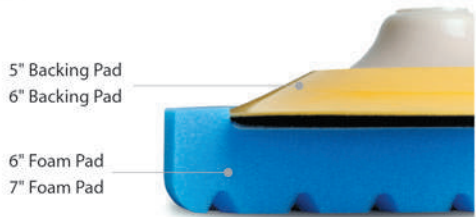

9" Diamond Face Foam Pads (Recessed Velcro)


- Recessed velcro for easy centering
- Specially cutted edge for narrow area polishing



T80 Yellow			
Item No.	Size	Pattern	
34079-1	9"	Diamond	
34059-1	9"	Flat	



T60 Blue			
Item No.	Size	Pattern	
34079-6	9"	Diamond	
34059-6	9"	Flat	



DxHxV(mm)
230x35x175



T40 Orange			
Item No.	Size	Pattern	
34079-4	9"	Diamond	
34059-4	9"	Flat	



T10 Gray			
Item No.	Size	Pattern	
34079-3	9"	Diamond	
34059-3	9"	Flat	

Work with:
6.8" Backing Pad



8.4 Specially Featured Foam pads & Wax Applier

Foam Pads For DA(Orbital) Polishing

- ✓ Applicable for both Rotary & DA polishing
- ✓ Withstand high temperature and water wash



T120 Green		
Item No.	Size	
34124-9	4"	
34126-9	6"	
34127-9	7"	



T80 Yellow		
Item No.	Size	
34124-1	4"	
34126-1	6"	
34127-1	7"	



T60 Blue		
Item No.	Size	
34124-6	4"	
34126-6	6"	
34127-6	7"	




DA(dual action) or orbital polishing causes the extra horizontal moving and deformation of foam pads, also the heating that generated by the eccentric system may be built up inside the foam. This range of pads are specially designed to meet orbital polishing.



T40 Orange		
Item No.	Size	
34124-4	4"	
34126-4	6"	
34127-4	7"	



T10 Red		
Item No.	Size	
34124-7	4"	
34126-7	6"	
34127-7	7"	



Size Description:			
Size	DxHxV(mm)	Center Hole	
4"	102x25x78	n/a	
6"	153x25x128	22mm	
7"	178x25x153	22mm	

6" Foam Pads with Backing Plate

Size 150x50mm



Item No.	Foam	Thread
34146-12	T80 Yellow High-Cut	M14
34146-62	T60 Blue Fast-Cut	M14
34146-42	T40 Orange Medium-Cut	M14
34146-32	T10 Gray Finishing	M14
34146-13	T80 Yellow High-Cut	M16
34146-63	T60 Blue Fast-Cut	M16
34146-43	T40 Orange Medium-Cut	M16
34146-33	T10 6" Gray Finishing	M16

Wax Applicator & Cleaning Foam



- ✓ Hand pad for comfortable holding
- ✓ Medium foam for interior cleaning
- ✓ Soft foam for waxing and washing



3" Round Wax Applicator Kit:
Item. **71132K3**
Includes:
1x soft hand pad 72.5mm
1x soft foam pad 80mm
1x medium foam pad 82mm



Square Washing & Waxing Kit:
Item. **71335K3**
Includes:
1x soft hand pad 122x67mm
1x soft foam pad 155x87mm
1x medium foam pad 155x87mm


8.5 Double-side Foam Pads




Double-Side Foam Pads

Work with 5/8"-11 adaptor
or 3M Hex Quick-Connect


Connection:



Double-Side Foam Pads (waffle)



Size	Item No.	Connect	Item No.	Connect
T80 Yellow Foam				
6"	49760-11	5/8"	49760-10	Hex
7"	49770-11	5/8"	49770-10	Hex
8"	49780-11	5/8"	49780-10	Hex
T60 Blue Foam				
6"	49760-61	5/8"	49760-60	Hex
7"	49770-61	5/8"	49770-60	Hex
8"	49780-61	5/8"	49780-60	Hex
T40 Orange Foam				
6"	49760-41	5/8"	49760-40	Hex
7"	49770-41	5/8"	49770-40	Hex
8"	49780-41	5/8"	49780-40	Hex
T10 Gray Foam				
6"	49760-31	5/8"	49760-30	Hex
7"	49770-31	5/8"	49770-30	Hex
8"	49780-31	5/8"	49780-30	Hex




Size	DxH(mm)
6"	150x60
7"	180x60
8"	200x60

Double-Side Foam Pads (flat face)



Size	Item No.	Connect	Item No.	Connect
T80 Yellow Foam				
6"	49060-11	5/8"	49060-10	Hex
7"	49070-11	5/8"	49070-10	Hex
8"	49080-11	5/8"	49080-10	Hex
T60 Blue Foam				
6"	49060-61	5/8"	49060-60	Hex
7"	49070-61	5/8"	49070-60	Hex
8"	49080-61	5/8"	49080-60	Hex
T40 Orange Foam				
6"	49060-41	5/8"	49060-40	Hex
7"	49070-41	5/8"	49070-40	Hex
8"	49080-41	5/8"	49080-40	Hex
T10 Red Foam				
6"	49060-71	5/8"	49060-70	Hex
7"	49070-71	5/8"	49070-70	Hex
8"	49080-71	5/8"	49080-70	Hex



Size	DxH(mm)
6"	150x50
7"	180x50
8"	200x50

8.6 Spot Polishing Pads

Extension Shaft (Hollow)



1.2" Backing Plate and Pads:



Item No.	Length	Int. Thread	Ext. Thread
ETS-80-14	80mm	M14	M14
ETS-80-58	80mm	5/8"-11	5/8"-11
ETS-40-14	40mm	M14	M14
ETS-40-58	40mm	5/8"-11	5/8"-11

Item No.	Desc.	Size	Remark
14212-24	Backing Plate	30mm(1.2")	M14
14212-14	Backing Plate	30mm(1.2")	5/8"-11
41515	Shoft-Wool Pad	40 mm	
340215-9	Foam Pad	40x10 mm	Green T120
340215-6	Foam Pad	40x10 mm	Blue T60
340215-4	Foam Pad	40x10 mm	Orange T40
340215-7	Foam Pad	40x10 mm	Red T10
41215	Micro-Fiber Pad	40x6 mm	

2" Backing Plate and Pads:



Item No.	Desc.	Size	Remark
14220-24	Backing Plate	48mm(2")	M14
14220-14	Backing Plate	48mm(2")	5/8"-11
41520	Shoft-Wool Pad	56 mm	
34022-9	Foam Pad	56x10 mm	Green T120
34022-6	Foam Pad	56x10 mm	Blue T60
34022-4	Foam Pad	56x10 mm	Orange T40
34022-7	Foam Pad	56x10 mm	Red T10
41220	Micro-Fiber Pad	56x6 mm	

3" Backing Plate and Pads:



Item No.	Desc.	Size	Remark
14231-24	Backing Plate	74mm(3")	M14
14231-14	Backing Plate	74mm(3")	5/8"-11
41530	Shoft-Wool Pad	80 mm	
34023-9	Foam Pad	80x25 mm	Green T120
34023-6	Foam Pad	80x25 mm	Blue T60
34023-4	Foam Pad	80x25 mm	Orange T40
34023-7	Foam Pad	80x25 mm	Red T10
41230	Micro-Fiber Pad	80x6 mm	

Red foam may be replaced with Gray foam.
Blue foam may be replaced with Yellow foam.

8.7 Foam Polishing Balls and Cones



Polishing Balls with 6mm Shank

Item No.	Color
48230-16	Yellow
48230-86	Maroon
48230-66	Blue
48230-46	Orange
48230-76	Red (Ultra Fine)

Ball size 77mm
Comes with a 1/4"-20 threaded short 6mm shank
Optional long shank adaptor (Item No.72011)

Polishing Cones for corner and narrow area polishing

Use in conjunction with liquid polish for high-gloss restoration
Work with electric tools
Max.Speed 3500/min



Polishing Cones with Hex shank

Item No.	Color	Mounting	Size	Density
48021-17	Yellow	Hex shank	Dia.80mm	Medium
48021-67	Blue	Hex shank	Dia.80mm	Medium
48021-47	Orange	Hex shank	Dia.80mm	Medium
48021-77	Red	Hex shank	Dia.80mm	Ultra Fine

Polishing Cones with 6mm shank

Item No.	Color	Mounting	Size	Density
48020-1	Yellow	6mm shank	Dia.80mm	Medium
48020-8	Maroon	6mm shank	Dia.80mm	Medium
48020-6	Blue	6mm shank	Dia.80mm	Medium
48020-4	Orange	6mm shank	Dia.80mm	Medium
48020-7	Red	6mm shank	Dia.80mm	Ultra Fine

8.7 Foam Polishing Balls and Cones

Polishing Cones for corner and narrow area polishing

Use in conjunction with liquid polish for high-gloss restoration
Work with electric tools
Max.Speed 3500/min



Polishing Cones for Rotary Polisher

For narrow area paint polishing and wheel hub polishing
Use with mini rotary polisher
Max.Speed 3500/min

Item No.	Color	Mounting	Density
48130-12	Yellow	M14	Medium
48130-82	Maroon	M14	Medium
48130-62	Blue	M14	Medium
48130-42	Orange	M14	Medium
48130-72	Red	M14	Ultra Fine



Cylindrical sponge

Item No.	Color	Mounting	Size	Density
48310-9	Green	3mm shank	28x30mm	Coarse
48310-1	Yellow	3mm shank	28x30mm	Medium
48310-7	Red	3mm shank	28x30mm	Ultra Fine



Conical sponge

Item No.	Color	Mounting	Size	Density
48010-9	Green	3mm shank	28x30mm	Coarse
48010-1	Yellow	3mm shank	28x30mm	Medium
48010-7	Red	3mm shank	28x30mm	Ultra Fine

9.1 Wool Pads



4 PLY 100% TWISTED WOOL **T240**
Each strand of high grade wool fiber is tightly twisted, allowing the pad to stay at consistent level of aggression for longer periods of operation. Heavy Cut.
Color: Natural.



1 PLY BLENDED WOOL - White **T200**
A fiber combination for light compounding, comprised of single ply untwisted wool and acrylic blend. Allows the operator to accomplish a range of light compounding to heavier polishing tasks.
Color: White.



1 PLY BLENDED WOOL - Yellow **T180**
A fiber combination for light compounding, comprised of single ply untwisted wool and acrylic blend. Allows the operator to accomplish a range of light compounding to heavier polishing tasks.
Color: White.




LAMBSWOOL SHEEPSKIN **T160**
The electrification process removes the microscopic barbs from the hairs in the wool resulting in a soft and effective compounding material that does not scratch the painted surface.
Color: Natural.



100% KNITTED-WOOL HIGH-NAP **T160**
Constructed of 100% wool knitted onto a synthetic backing. The quality is consistent compared to natural wool material.
Color: Natural.



100% KNITTED-WOOL SHORT-NAP **T140**
Constructed of 100% wool knitted into a synthetic backing. The nap high is 6mm for finer polishing.
Color: Natural.

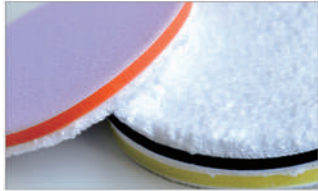

MICRO-FIBER **T20**
Constructed of knitted polyester nano fiber with micro fiber at 1/10 diameter of natural wool fiber. Suitable for finer cutting and final finishing, gives higher gloss on paint. It also be used to apply the wax and sealant.
Color: White

CUT
Level

9.2 Wool Pads

4 PLY100% TWISTED WOOL

Each strand of high grade wool fiber is tightly twisted, allowing the pad to stay at consistent level of aggression for longer periods of operation. Heavy Cut.
Color: Natural.



Single Side Wool Pads

Item No.	Size	Color	Wool Spec.	Cutting Level
45050-42	5"	Natural	4-ply 100% Wool	T240 Heavy-Cut
45060-42	6"	Natural	4-ply 100% Wool	T240 Heavy-Cut
45080-42	7"	Natural	4-ply 100% Wool	T240 Heavy-Cut

Double Side Wool Pads with 5/8" bolt

Item No.	Size	Color	Wool Spec.	Cutting Level
46070-42	7"	Natural	4-ply 100% Wool	T240 Heavy-Cut
45080-42	7"	Natural	4-ply 100% Wool	T240 Heavy-Cut

1 PLY BLENDED WOOL

A fiber combination for light compounding, comprised of single ply untwisted wool and acrylic blend. Allows the operator to accomplish a range of light compounding to heavier polishing tasks.



Single Side Wool Pads

Item No.	Size	Color	Wool Spec.	Cutting Level
45080-11	7"	White	1-ply blended Wool	T200 Mid-Cut

Double Side Wool Pads with 5/8" bolt

Item No.	Size	Color	Wool Spec.	Cutting Level
46070-11	7"	White	1-ply blended Wool	T200 Mid-Cut
46080-11	8"	White	1-ply blended Wool	T200 Mid-Cut

Single Side Wool Pads

Item No.	Size	Color	Wool Spec.	Cutting Level
45080-13	7"	Yellow	1-ply blended Wool	T180 Mid-Cut

Double Side Wool Pads with 5/8" bolt

Item No.	Size	Color	Wool Spec.	Cutting Level
46080-13	8"	Yellow	1-ply blended Wool	T180 Mid-Cut

9.2 Wool Pads

Lambswool (Sheepskin) Pad

Remove deep scratches, overspray, 1200/1500# sanding disc marks, heavy oxidation.
For Rotary Polisher use




Lambswool (Sheepskin) Pad

Remove deep scratches, overspray, 1200/1500# sanding disc marks, heavy oxidation.
For Rotary Polisher use

CUT
T160

Item No.	Size	Backing Pad	Fasterning
41030	80mm	3 inch Plate	Velcro
41050	125mm	5 inch Plate	Velcro
41060	150mm	6 inch Plate	Velcro
41070	180mm	7 inch Plate	Velcro

Knitted Wool Polishing Pad

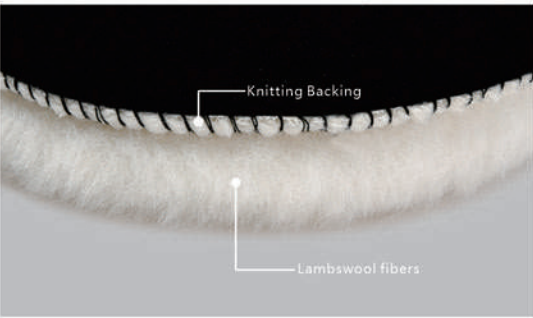

Knitted wool pads offered by SunnyPads are of 100% wool content, the customized manufacturing technics produces the material in consistent fiber thickness, nap-height and density, less linting, ensure the pad in uniform quality, unlike the variances that can occur with some natural sheepskin pads.

Premium preformance on abrasive action and heat-ressistance. Working with high-cut wax to aggressively remove scratches and oxid, reduces the swirls and leaves a gloss finish.

Knitted Wool Pad (High-Nap)

Remove deep scratches, overspray, 1200/1500# sanding disc marks, heavy oxidation.
For Rotary Polisher use

CUT
T160

Item No.	Size	Backing Pad	Fasterning
41120	56mm	2 inch Plate	Velcro
41130	84mm	3 inch Plate	Velcro
41150	130mm	5 inch Plate	Velcro
41160	154mm	6 inch Plate	Velcro
41170	184mm	7 inch Plate	Velcro

9.3 Wool Pads

Knitted Wool Pad Short-Nap (with foam cushion)

Short-Nap Wool pad is made of knitted 100% ultra-fine wool with nap height of 6mm. A soft cushion layer is laminated between wool and velour backing. Ideal to work with FlexEdge backing plates.

Remove deep scratches, overspray, 1200/1500# sanding disc marks, heavy oxidation.For Rotary & DA Polisher use.

CUT
T140



Item No.	Size	Backing Pad	Center Hole	Cushion Foam
41340-7	3"(88mm)	3"	n/a	20mm
41362-7	5"(150mm)	5"	22mm	20mm
41372-7	6"(170mm)	6"	22mm	20mm

Item No.	Size	Backing Pad	Center Hole	Cushion Foam
41360	6"(150mm)	5"	22mm	Gray(15mm)
41370	7"(180mm)	6"	22mm	Gray(15mm)

Item No.	Size	Backing Pad	Center Hole	Cushion Foam
41335	3"(88mm)	3"	n/a	12mm
41355	5"(138mm)	5"	22mm	12mm
41365	6"(163mm)	6"	22mm	12mm

Item No.	Size	Backing Pad	Center Hole	Cushion Foam
41735	3"(84mm)	3"	n/a	8mm
41755	5"(134mm)	5"	22mm	8mm
41765	6"(159mm)	6"	22mm	8mm

Knitted Wool Pad Short-Nap (No foam cushion)

CUT
T140




Item No.	Size	Backing Pad	Center Hole	Cushion Foam
41530	3"(80mm)	3"	n/a	n/a
41535	3.5"(95mm)	3.5"	n/a	n/a
41540	4"(105mm)	4"	n/a	n/a
41550	5"(130mm)	5"	n/a	n/a
41560	6"(155mm)	6"	n/a	n/a
41570	7"(185mm)	7"	n/a	n/a

9.3 Wool Pads

Micro-fiber Pad

Made of 100% polyester nano fiber, the customized manufacturing technics produces the micro fiber at 1/10 diameter of natural wool fiber.

It eliminate the swirls and leaves mirror gloss finish by working with final finish polish. For DA polisher use.

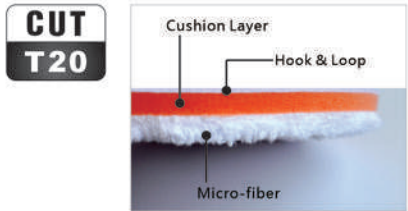

Item No.	Size	Backing Pad	Center Hole	Cushion Foam
41230	3"(80mm)	3"	n/a	Orange(6mm)
41235	3.5"(95mm)	3.5"	n/a	Orange(6mm)
41240	4"(105mm)	4"	n/a	Orange(6mm)
41250	5"(130mm)	5"	n/a	Orange(6mm)
41260	6"(155mm)	6"	n/a	Orange(6mm)
41270	7"(185mm)	7"	n/a	Orange(6mm)

Remark: Standard cushion foam color is Orange, it can be customized upon request.
Orange/Yellow/Blue Foam is Medium Density. Gray Foam is Ultra-Soft.



Item No.	Size	Backing Pad	Center Hole	Cushion Foam
41835	3"(84mm)	3"	n/a	6mm Straight
41855	5"(132mm)	5"	22mm	6mm Straight
41865	6"(157mm)	6"	22mm	6mm Straight

Item No.	Size	Backing Pad	Center Hole	Cushion Foam
41236	3"(88mm)	3"	n/a	12mm bevel
41255	5"(138mm)	5"	22mm	12mm bevel
41265	6"(163mm)	6"	22mm	12mm bevel

Corduroy polishing Pad



Item No.	Size	Backing Pad	Cushion Foam
41635	90mm	3"	10mm Straight
41653	135mm	5"	10mm Straight

Denim polishing Pad



Item No.	Size	Backing Pad	Cushion Foam
41430-3	80mm	3"	10mm Straight
41461-3	135mm	5"	10mm Straight

9.4 Stone Working Pads and felt mops

Felt Mops



Item No.	Size	Thread	Max.RPM
47050-1	125x25mm	5/8"-11	12000
47050-2	125x25mm	M14	12000
47070-1	180x25mm	5/8"-11	7000
47070-2	180x25mm	M14	7000

Applicable for stone working / glass polishing with water.



Felt Disc with velcro



Item No.	Size	Velcro	Max.RPM
47120-2	50x6 mm	✓	12000
47130-2	80x6 mm	✓	12000
47140-2	100x6 mm	✓	12000
47145-2	115x6 mm	✓	12000
47150-2	125x6 mm	✓	12000
47160-2	150x6 mm	✓	7000

Applicable for stone working / glass polishing / Stainless Steel polishing